


ISOMETRIC END VIEW

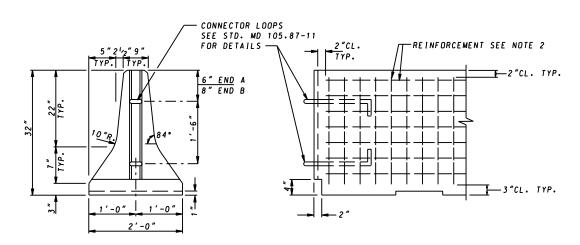

END VIEW

REINFORCEMENT DETAIL

NOTES

- 1. CONCRETE SHALL BE MIX NO. 6 (4500 PSI) .
- 2. REINFORCEMENT SHALL BE GALVANIZED OR EPOXY COATED 4"x4"-W4.0xW4.0 WELDED WIRE FABRIC PLACED ALONG THE CENTERLINE OF THE BARRIER.
- 3. ONE CONNECTOR PIN SHALL BE FURNISHED WITH EACH BARRIER. THE COST OF THE CONNECTOR PIN SHALL BE INCIDENTAL TO THE ITEM PRECAST TEMPORARY 32 INCH F SHAPE CONCRETE TRAFFIC BARRIER.
- 4. SEE SPECIFICATION 104 FOR LOCATION OF BARRIER WALL MARKER.

SPECIFICATION CATEGORY CODE ITEMS **Maryland Department of Transportation** 104 STATE HIGHWAY ADMINISTRATION Kik G. M. Cell **APPROVED** STANDARDS FOR HIGHWAYS AND INCIDENTAL STRUCTURES PRECAST TEMPORARY 32 INCH APPROVAL • APPROVAL • FEDERAL REVISIONS F SHAPE CONCRETE TRAFFIC BARRIER HIGHWAY ADMINISTRATION APPROVAL 3-1-01 APPROVAL 3-28-01 (PIN AND LOOP JOINT) REVISED 10-1-01 REVISED REVISED STANDARD NO. MD 105.87-10 REVISED REVISED